



LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

Novara LED Vanity NVV Series



Features

Diamond point formed metal with white acrylic diffuser. Available in 2, 3, or 4 ft. models. Can be mounted horizontal or vertical. Fixture mounts standard to junction box (not included).

Construction

Die-cast metal diffuser bracket, stamped metal backplate. Power supply connections must be made inside a junction box (not included).

Finish

All cast metal components are finished in Satin Nickel or Satin Brass.

Diffuser

White acrylic diffuser.

Electrical

Input 120VAC / 60Hz.
Compatible with residential TRIAC and ELV dimmers.

LED

Integrated LED modules capable of producing:
31W = 2400 source lumens, 680 delivered lumens
46.5W = 3600 source lumens, 1116 delivered lumens
62W = 4800 source lumens, 1625 delivered lumens
3000K (CCT). Rated for 50,000 Hrs., 90 CRI.


Certification

All fixtures are cETLus listed for indoor damp locations.
ADA

Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date-of-purchase.

Specifications and dimensions
subject to change without notice.

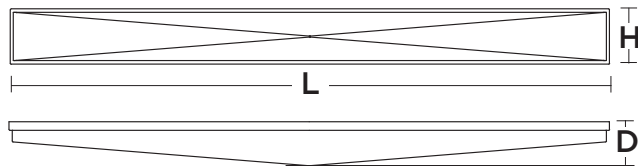

Ordering Information:

Satin Nickel	Satin Brass	LED	Source Lumens	Delivered Lumens	CCT	L	H	D
NVV5252400L30D1SN	NVV5252400L30D1SB	31W	2400	680	3000K	25"	4-1/2"	3-5/8"
NVV5373600L30D1SN	NVV5373600L30D1SB	46.5W	3600	1116	3000K	37"	4-1/2"	3-5/8"
NVV5494800L30D1SN	NVV5494800L30D1SB	62W	4800	1625	3000K	49"	4-1/2"	3-5/8"